

Effective suction performance with compact design

Paint mist extraction wall FarbMax



Schuko FarbMax – quality at a sensational price!


- Legal requirements are becoming more and more stringent and the public is becoming increasingly sensitive to environmental quality. A painting area without paint contamination and working conditions that do not impair the health of you and your employees are now becoming an absolute necessity.
- With the FarbMax, Schuko has developed a sensationally economical and space-saving paint mist extraction wall. Just right for small businesses or a second workplace.
- **Right price and high Schuko-Quality**
You enjoy the proven high Schuko quality at the most economical price possible. Even if you only carry out spraying work occasionally, there is now no reason to do it without a paint mist extraction wall for reasons of cost or space.
- Your factory, your employees, your neighbours and your own health will thank you.

The benefits at one glance:

- Effective suction performance
- Integrated underfloor suction
- Large filter area provides optimum capture of paint particles
- Triple filter layer
- Easy accessibility ensures quick and easy replacement of cost-effective filters
- Energy-efficient operation
- Low maintenance
- Solid compact construction with low installation depth (800 mm) - just right for small factories
- Simple and quick installation
- Comprehensive customer service for fast and qualified service

Technical data Schuko FarbMax

Article No.:	517 100
Motor revs:	2,860 rpm
Protection type:	Atex II 2G Ex eb IIC T3 Gb, Zone 1
Power consumption:	1,85 kW
Voltage:	3 Ph ≈ 400 V, 50 Hz
Nominal volume flow:	3,600 m ³ /h
Surface area:	2 m ²
Exhaust duct Ø:	300 mm
Dimensions L/W/H:	2,650 x 810 x 1,355 mm
Weight:	170 kg
Filter mat (surface area):	Art-No: 517 110
normal flammability according to DGUV-I-209-046	
In case of repeat orders we deliver 10 meters	
Filter mat (internal): green/white	Art-No: 517 120
2,000 x 1,500 mm	
Fine dust filter according to ISO ePM10 50 %	
2,000 x 1,500 mm	Art-No: 527 750
Push-in floor filter	Art-No: 517 130
500 x 500 x 20 mm	

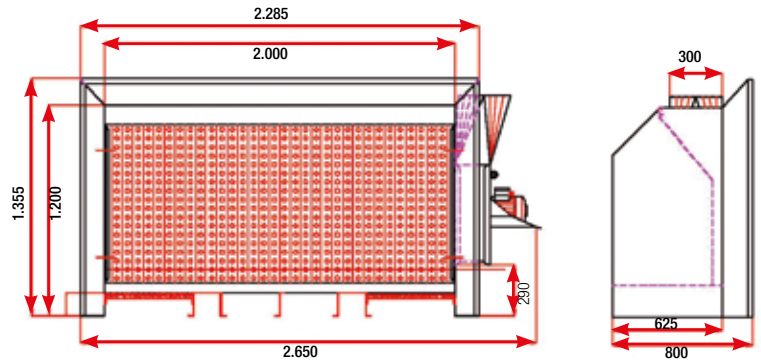

Customize individually:

The fan, which is generally placed on the right side of the FarbMax, can be turned backwards about 90°. The air vent then points horizontally to the rear.

In special cases, the fan can be installed separately from the FarbMax. The connection between the spraying area and the fan is then made by pipes.

The additional installation of an **undercarriage** can increase the capabilities of use. (Artikel-No. 517 140)

Equipment:



Water basins with grates
Art.-No. 517 400




Spraying and varnishing pillar
Art.-No. 517 300

Moving device Art.-No. 517 140
4 caster wheels, 2 fixable

Additional costs for
motor with 2 speeds
1425/2860 rpm, 0,65/2,4 kW,
400 V, 50 Hz Art.-No. 517 770

Installation examples

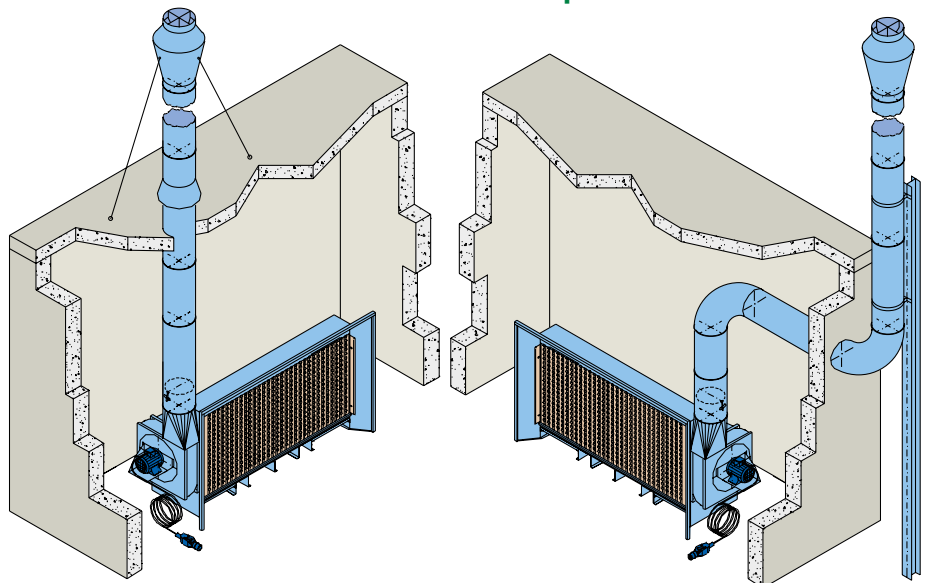

Schuko FarbMax
with exhaust air ducting
through the roof.

Schuko FarbMax
with exhaust air ducting
through the wall.



49196 Bad Laer · Gewerbepark 2
88348 Bad Saulgau · Mackstraße 18
97478 Knetzgau · Industriestraße 22
55481 Kirchberg/H. · Kappeler Straße 20 a
14959 Trebbin · Heinrich-Schulte-Südhoff-Str. 1
25451 Quickborn · Pascalstr. 22
62-561 Ślesin, POLAND · Kolonia Sarnowa · Biskupie Sarnowskie 9

+49 (0) 54 24 / 80 6-0 · info@schuko.de
+49 (0) 75 81 / 48 71-0 · saulgau@schuko.de
+49 (0) 95 27 / 92 28-0 · knetzgau@schuko.de
+49 (0) 67 63 / 30 319-0 · kirchberg@schuko.de
+49 (0) 33731 / 86 7-0 · trebbin@schuko.de
+49 (0) 41 06 / 76 71-0 · quickborn@schuko.de
+48 (0) 63 / 245 64 00 · slesin@schuko.pl

www.schuko.de